

FRAMED SLIDING GLAZING


alutec
PREMIUM

alutec
DENSE

USER AND SERVICE MANUAL

USAGE:

Premium and Dense terrace glazing is designed for continuous use. The glazing works best when the panels are moved regularly. This prevents dust and other airborne contaminants from accumulating between the wheels and other moving parts. The lower profile groove should be cleaned from time to time if dirt or moisture accumulates there.

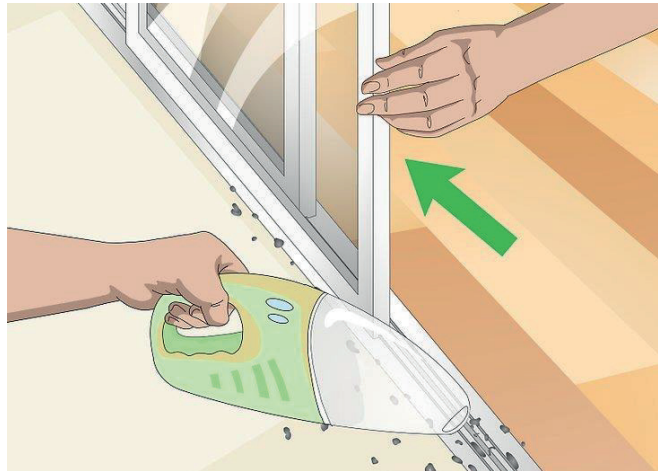


CLEANING AND SERVICE:

It is recommended to clean the glass surfaces from time to time with water and a standard window cleaner. Avoid using abrasive cleaners or abrasive cloths to prevent scratching the profile surfaces. To ensure a long service life, the wheels can be lubricated with spray oil (e.g., Teflon spray or lock oil) approximately once a year, if desired.



FOGGING OF GLASS

If the door from the apartment to the balcony is open, condensation may form on the glass surface, causing the glass to fog up. When this happens, various patterns may appear on the glass surface. This is completely normal and is a characteristic of tempered glass.

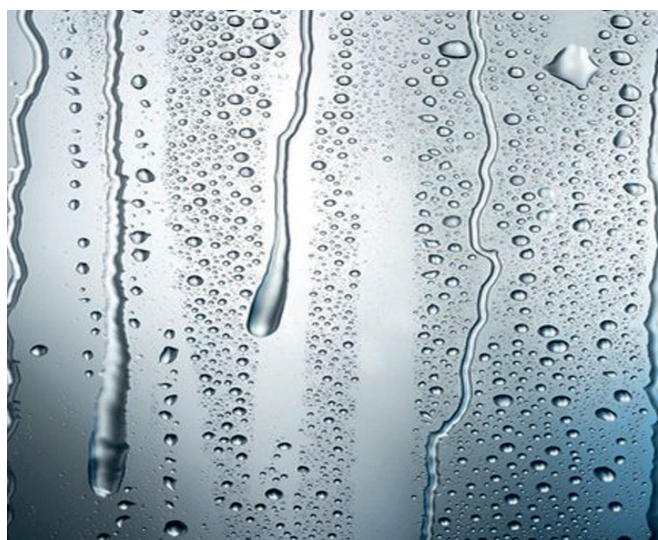

MONITORING OF CLEARANCES:

The foundations of the finished terrace opening may shift due to frost heave and/ or changes in humidity, which can cause the sliding glass panels to jam or even come loose. As the end customer, you are responsible for monitoring the clearance above the sliding glass panels as the deck moves and for notifying the seller if the overlap between the vertical frame of the sliding glass panel and the top rail becomes less than 6 mm.



SEALING AND VENTILATION

Due to the design of the terrace glazing system, there is no gap between the panes of glass. If you wish to improve ventilation, you can open the door glass slightly.

Note! Under certain weather conditions, water or snow may accumulate on the balcony. Therefore, outdoor furniture must be weather-resistant.

ADJUSTMENT OF THE LOCK

Changes to the installation opening of the deck can also affect how the locks work: they may jam or fail to lock properly. You can adjust the lock tongue's counterplate up or down to improve the lock's performance.



Professional in aluminum and glass construction

Alutec Ltd. is a family-owned business founded in 1979 that specializes in aluminum and glass construction. Our design, product development, and manufacturing operations are based in Ylivieska, Northern Ostrobothnia.

Our extensive experience, wide range of aluminum and glass construction products, and commitment to service are reflected in the satisfaction of our customer base. We are the solution to our customers' aluminum and glass construction needs.

alutec

Alutec Oy
Alumiinikatu 5
84100 Ylivieska

p. +3588 410 5500
myynti@alutec.fi
www.alutec.fi

See pictures of reference installations

 @alutecsuomi

 @aluteclasisut

